# Chapter 3 outline

- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer

- 3.5 connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

# TCP: Overview RFCs: 793,1122,1323, 2018, 2581

- point-to-point:
  - one sender, one receiver
- reliable, in-order byte steam:
  - no "message boundaries"
- pipelined:
  - TCP congestion and flow control set window size

#### full duplex data:

- bi-directional data flow in same connection
- MSS: maximum segment size
- connection-oriented:
  - handshaking (exchange of control msgs) inits sender, receiver state before data exchange
- flow controlled:
  - sender will not overwhelm receiver

### TCP segment structure


URG: urgent data (generally not used)

ACK: ACK # valid

PSH: push data now (generally not used)

RST, SYN, FIN: connection estab (setup, teardown commands)

> Internet checksum' (as in UDP)

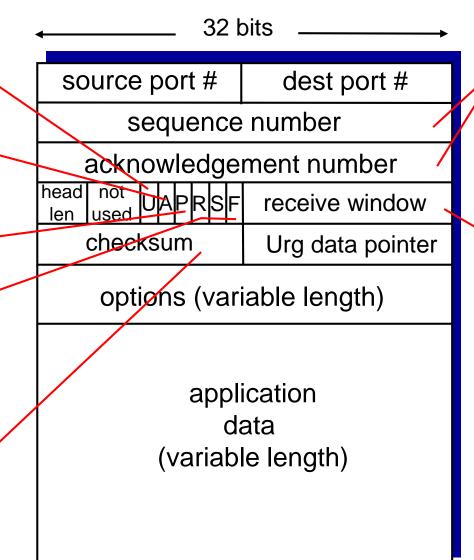

by bytes of data (not segments!)

> # bytes rcvr willing to accept


# TCP seq. numbers, ACKs

#### sequence numbers:


 byte stream "number" of first byte in segment's data

#### acknowledgements:

- seq # of next byte expected from other side
- cumulative ACK
- Q: how receiver handles out-of-order segments
  - A: TCP spec doesn't say,
    - up to implementor

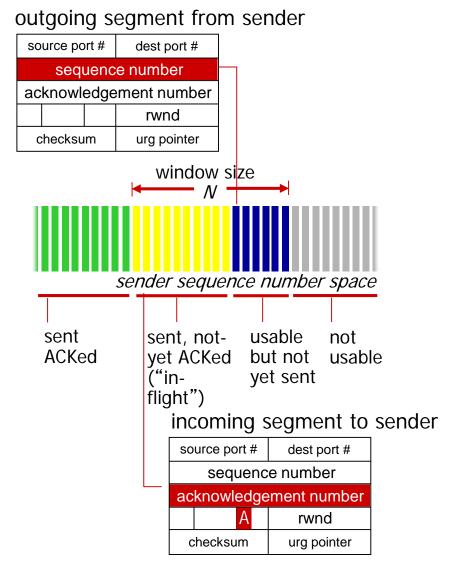

# TCP seq. numbers, ACKs

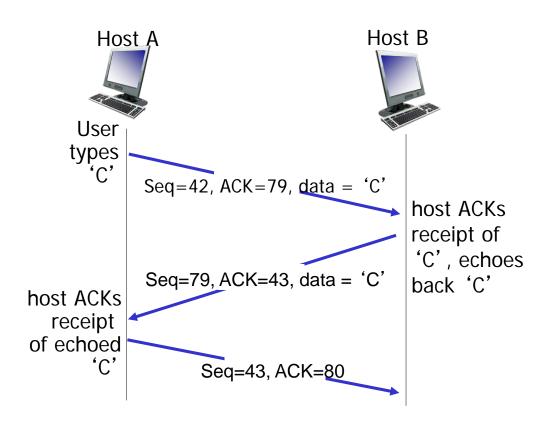

simple telnet scenario

# TCP round trip time, timeout


- Q: how to set TCP timeout value?
- longer than RTT
  - but RTT varies
- too short: premature timeout, unnecessary retransmissions
- too long: slow reaction to segment loss

- Q: how to estimate RTT?
- SampleRTT: measured time from segment transmission until ACK receipt
  - ignore retransmissions
- SampleRTT will vary, want estimated RTT "smoother"
  - average several recent measurements, not just current SampleRTT

# TCP round trip time, timeout

EstimatedRTT =  $(1-\alpha)$ \*EstimatedRTT +  $\alpha$ \*SampleRTT

- exponential weighted moving average
- influence of past sample decreases exponentially fast
- typical value:  $\alpha = 0.125$

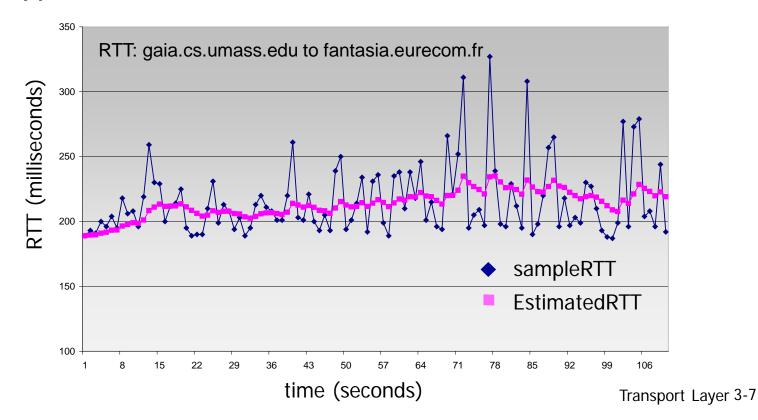

# TCP round trip time, timeout

- timeout interval: EstimatedRTT plus "safety margin"
  - large variation in **EstimatedRTT** -> larger safety margin
- estimate SampleRTT deviation from EstimatedRTT:

```
DevRTT = (1-\beta)*DevRTT +

\beta*|SampleRTT-EstimatedRTT|

(typically, \beta = 0.25)
```

TimeoutInterval = EstimatedRTT + 4\*DevRTT



estimated RTT

"safety margin"

<sup>\*</sup> Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose\_ross/interactive/

# Chapter 3 outline

- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer

- 3.5 connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

## TCP reliable data transfer

- TCP creates rdt service on top of IP's unreliable service
  - pipelined segments
  - cumulative acks
  - single retransmission timer
- retransmissions triggered by:
  - timeout events
  - duplicate acks

# let's initially consider simplified TCP sender:

- ignore duplicate acks
- ignore flow control, congestion control

#### TCP sender events:

#### data rcvd from app:

- create segment with seq #
- seq # is byte-stream number of first data byte in segment
- start timer if not already running
  - think of timer as for oldest unacked segment
  - expiration interval: TimeOutInterval


#### timeout:

- retransmit segment that caused timeout
- restart timer


#### ack rcvd:

- if ack acknowledges previously unacked segments
  - update what is known to be ACKed
  - start timer if there are still unacked segments


# TCP sender (simplified)

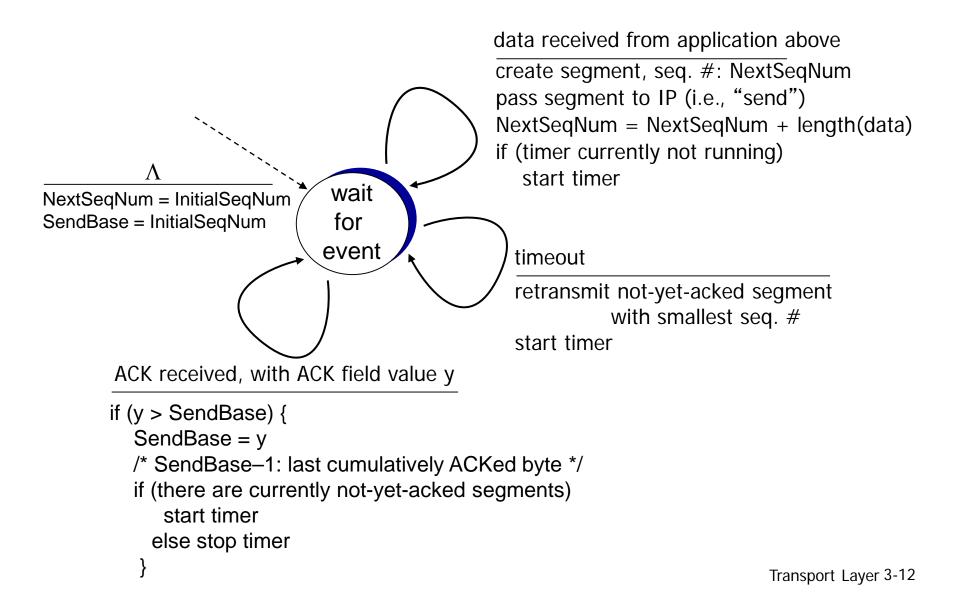

### TCP: retransmission scenarios

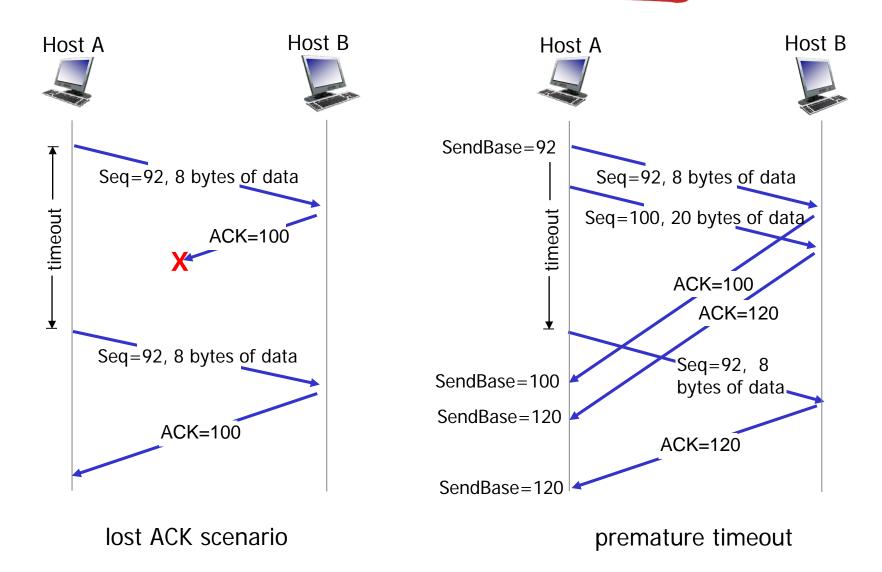

### TCP: retransmission scenarios

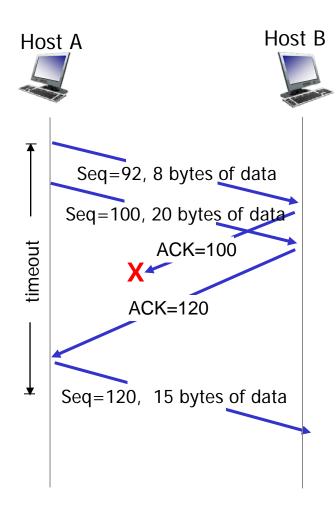

cumulative ACK

# TCP ACK generation [RFC 1122, RFC 2581]

event at receiver	TCP receiver action
arrival of in-order segment with expected seq #. All data up to expected seq # already ACKed	delayed ACK. Wait up to 500ms for next segment. If no next segment, send ACK
arrival of in-order segment with expected seq #. One other segment has ACK pending	immediately send single cumulative ACK, ACKing both in-order segments
arrival of out-of-order segment higher-than-expect seq. # . Gap detected	immediately send duplicate ACK, indicating seq. # of next expected byte
arrival of segment that partially or completely fills gap	immediate send ACK, provided that segment starts at lower end of gap

## TCP fast retransmit


- time-out period often relatively long:
  - long delay before resending lost packet
- detect lost segments via duplicate ACKs.
  - sender often sends many segments backto-back
  - if segment is lost, there will likely be many duplicate ACKs.

#### TCP fast retransmit

if sender receives 3
ACKs for same data
("triple duplicate ACKs"),
resend unacked
segment with smallest
seq #

 likely that unacked segment lost, so don't wait for timeout

## TCP fast retransmit

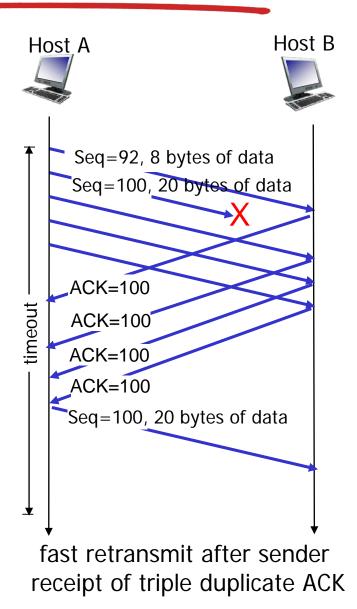

# Chapter 3 outline

- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer

- 3.5 connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

### TCP flow control

application may remove data from TCP socket buffers ....

... slower than TCP receiver is delivering (sender is sending)

### application process application OS TCP socket receiver buffers **TCP** code IΡ code from sender


receiver protocol stack

#### flow control

receiver controls sender, so sender won't overflow receiver's buffer by transmitting too much, too fast

### TCP flow control

- receiver "advertises" free buffer space by including rwnd value in TCP header of receiver-to-sender segments
  - RcvBuffer size set via socket options (typical default is 4096 bytes)
  - many operating systems autoadjust RcvBuffer
- sender limits amount of unacked ("in-flight") data to receiver's rwnd value
- guarantees receive buffer will not overflow

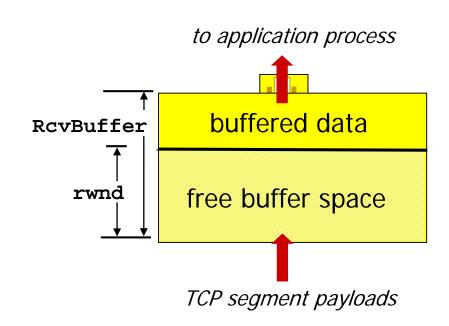

receiver-side buffering

# Chapter 3 outline


- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer

- 3.5 connection-oriented transport: TCP
  - segment structure
  - reliable data transfer
  - flow control
  - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

### Connection Management

before exchanging data, sender/receiver "handshake":

- agree to establish connection (each knowing the other willing to establish connection)
- agree on connection parameters



```
connection state: ESTAB
connection Variables:
seq # client-to-server
server-to-client
rcvBuffer size
at server,client

network
```


```
Socket clientSocket =
  newSocket("hostname","port
  number");
```


```
Socket connectionSocket =
  welcomeSocket.accept();
```

application

#### Agreeing to establish a connection

#### 2-way handshake:




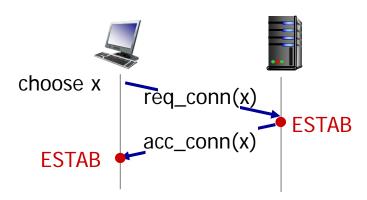


- Q: will 2-way handshake always work in network?
- variable delays
- retransmitted messages (e.g. req\_conn(x)) due to message loss
- message reordering
- can't "see" other side


#### Agreeing to establish a connection

#### 2-way handshake failure scenarios:

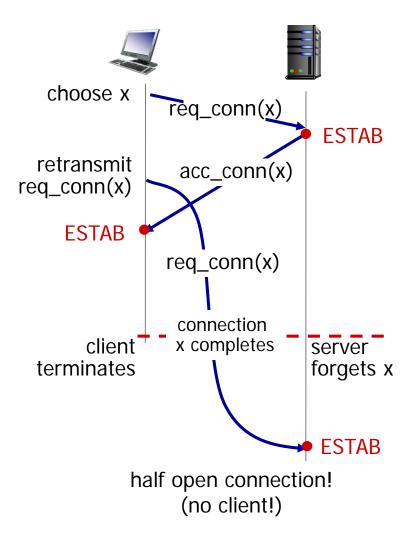


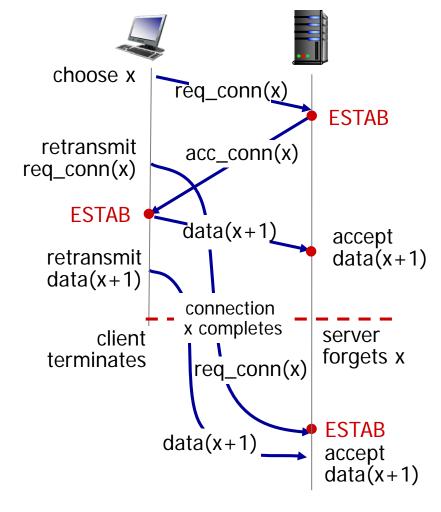

### TCP 3-way handshake

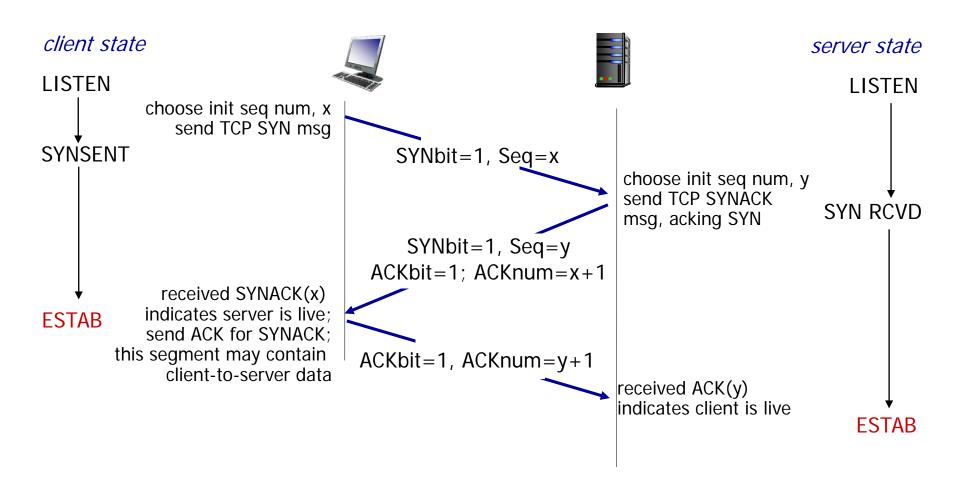

### TCP 3-way handshake: FSM

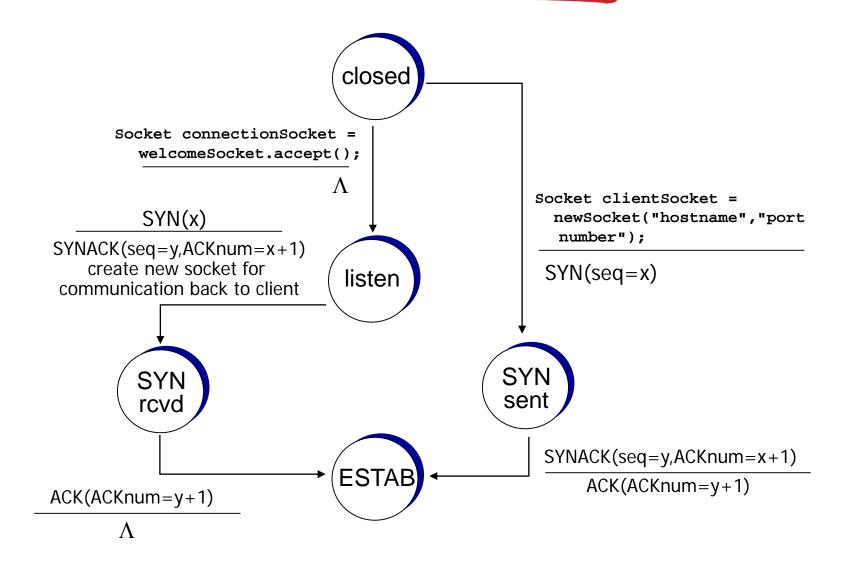

# TCP: closing a connection

- client, server each close their side of connection
  - send TCP segment with FIN bit = I
- respond to received FIN with ACK
  - on receiving FIN, ACK can be combined with own FIN
- simultaneous FIN exchanges can be handled

# TCP: closing a connection

