http://algs4.cs.princeton.edu

2.1 KNUTH SHUFFLE DEMO

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

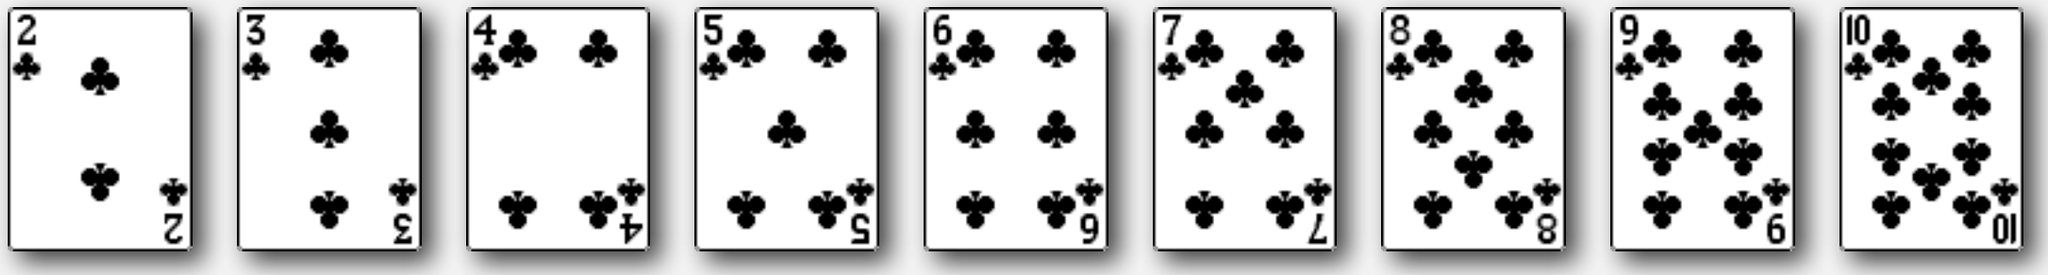

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

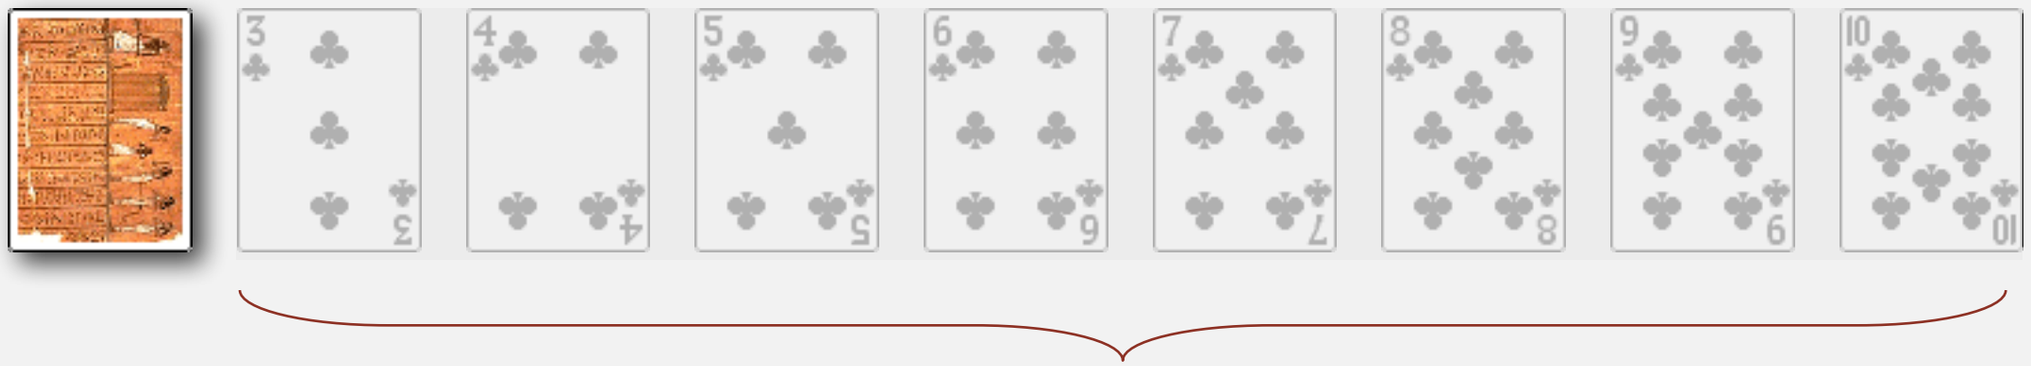

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

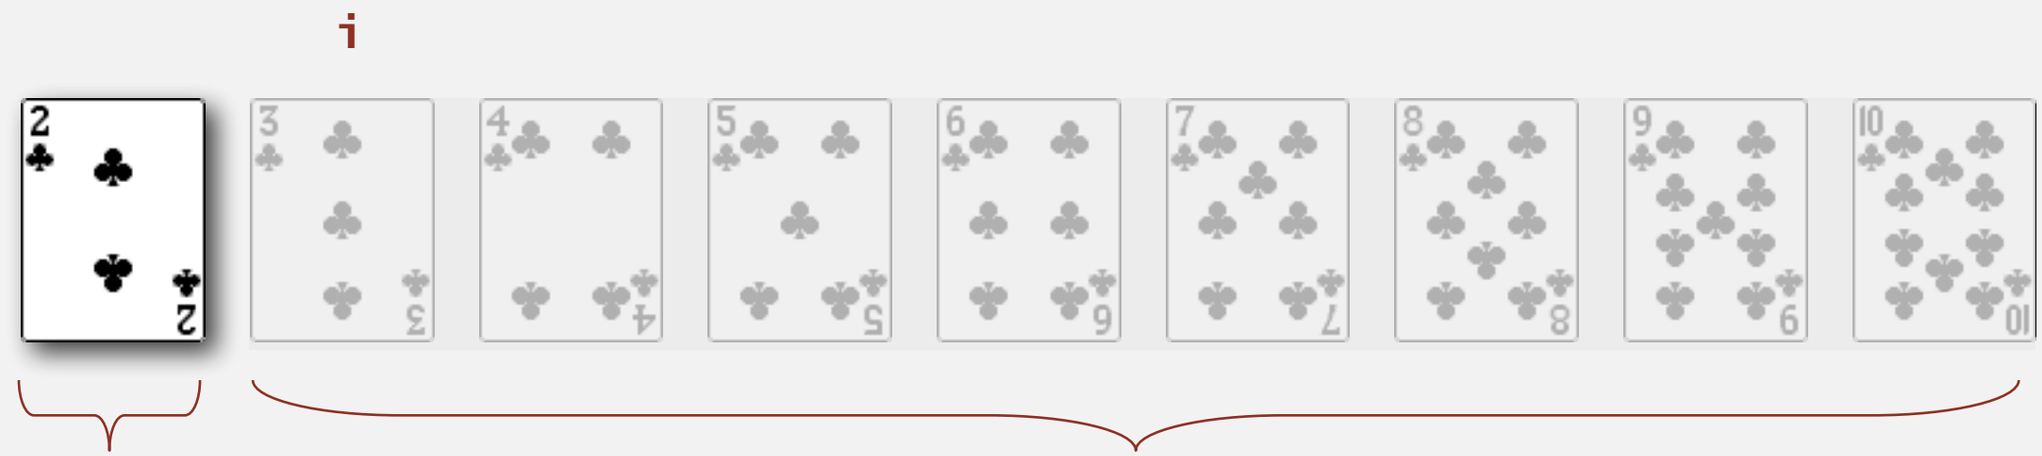

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

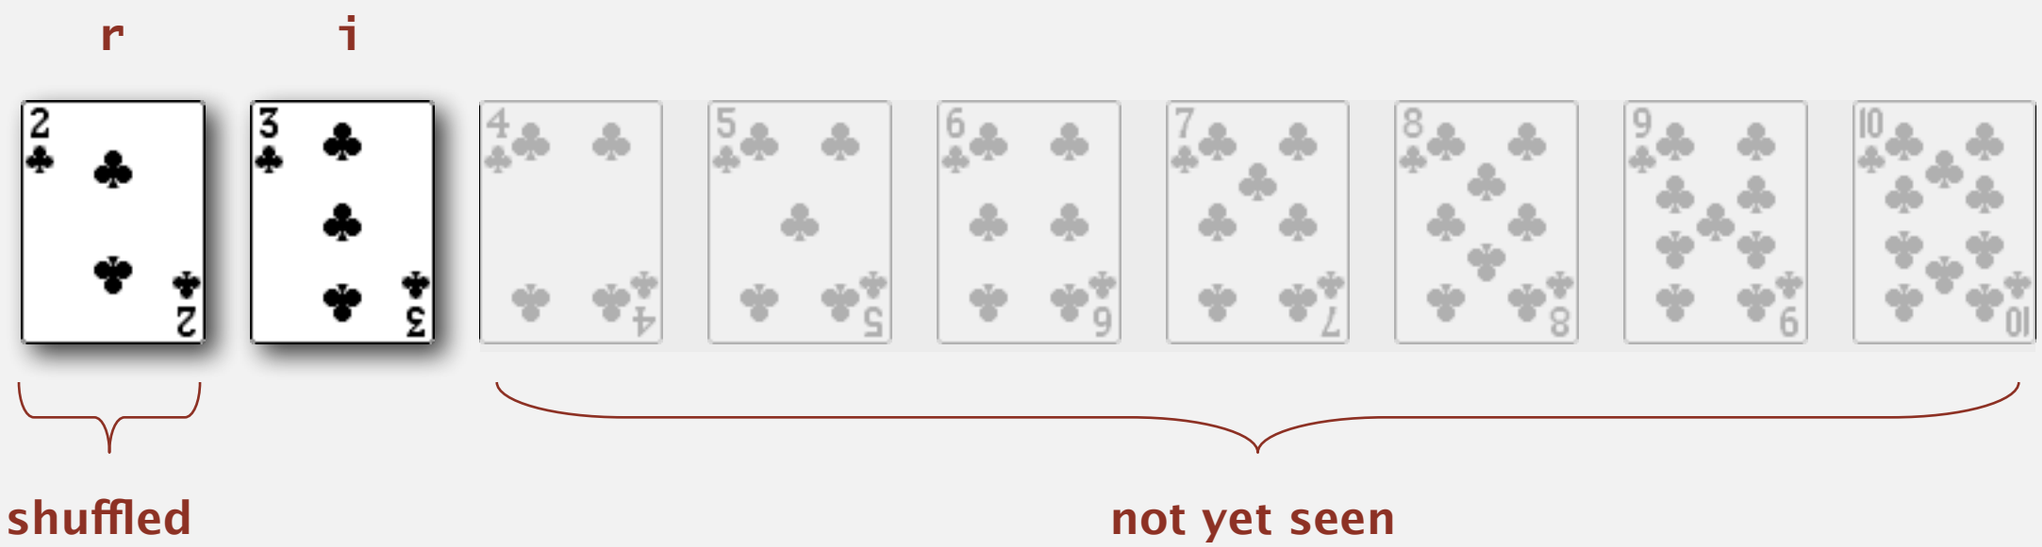

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

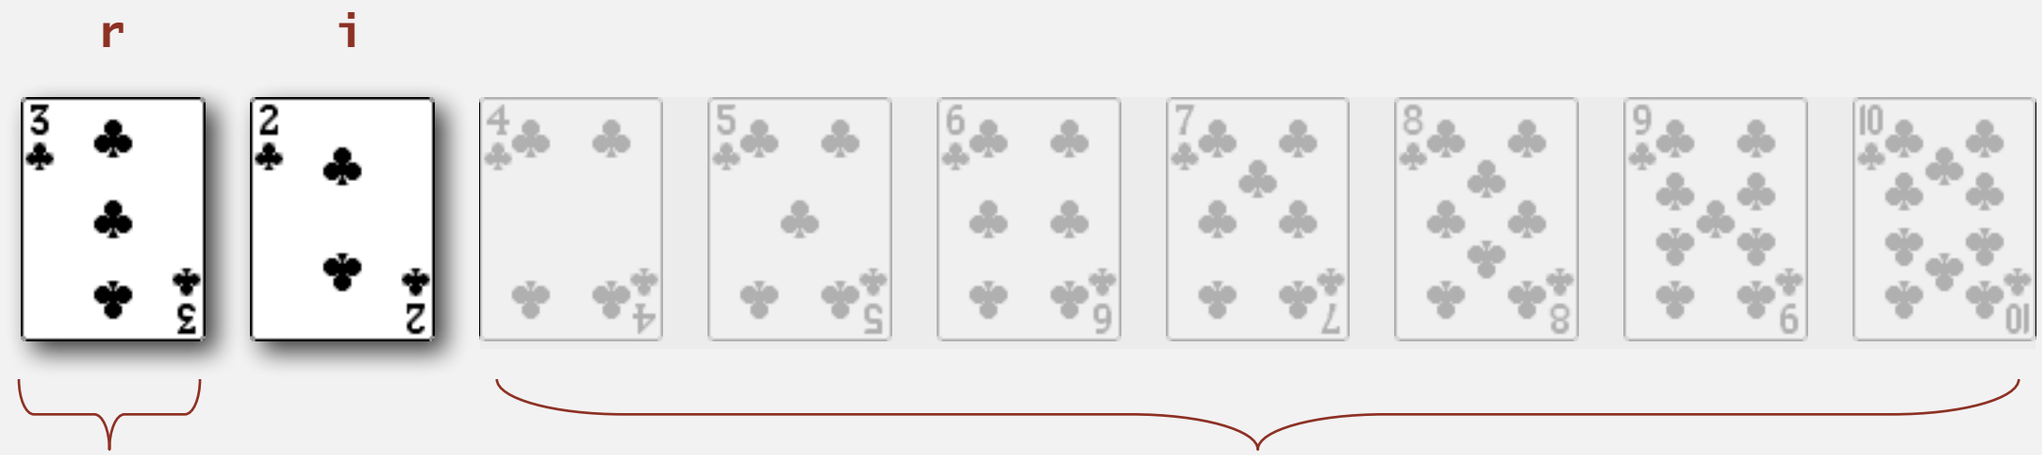

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

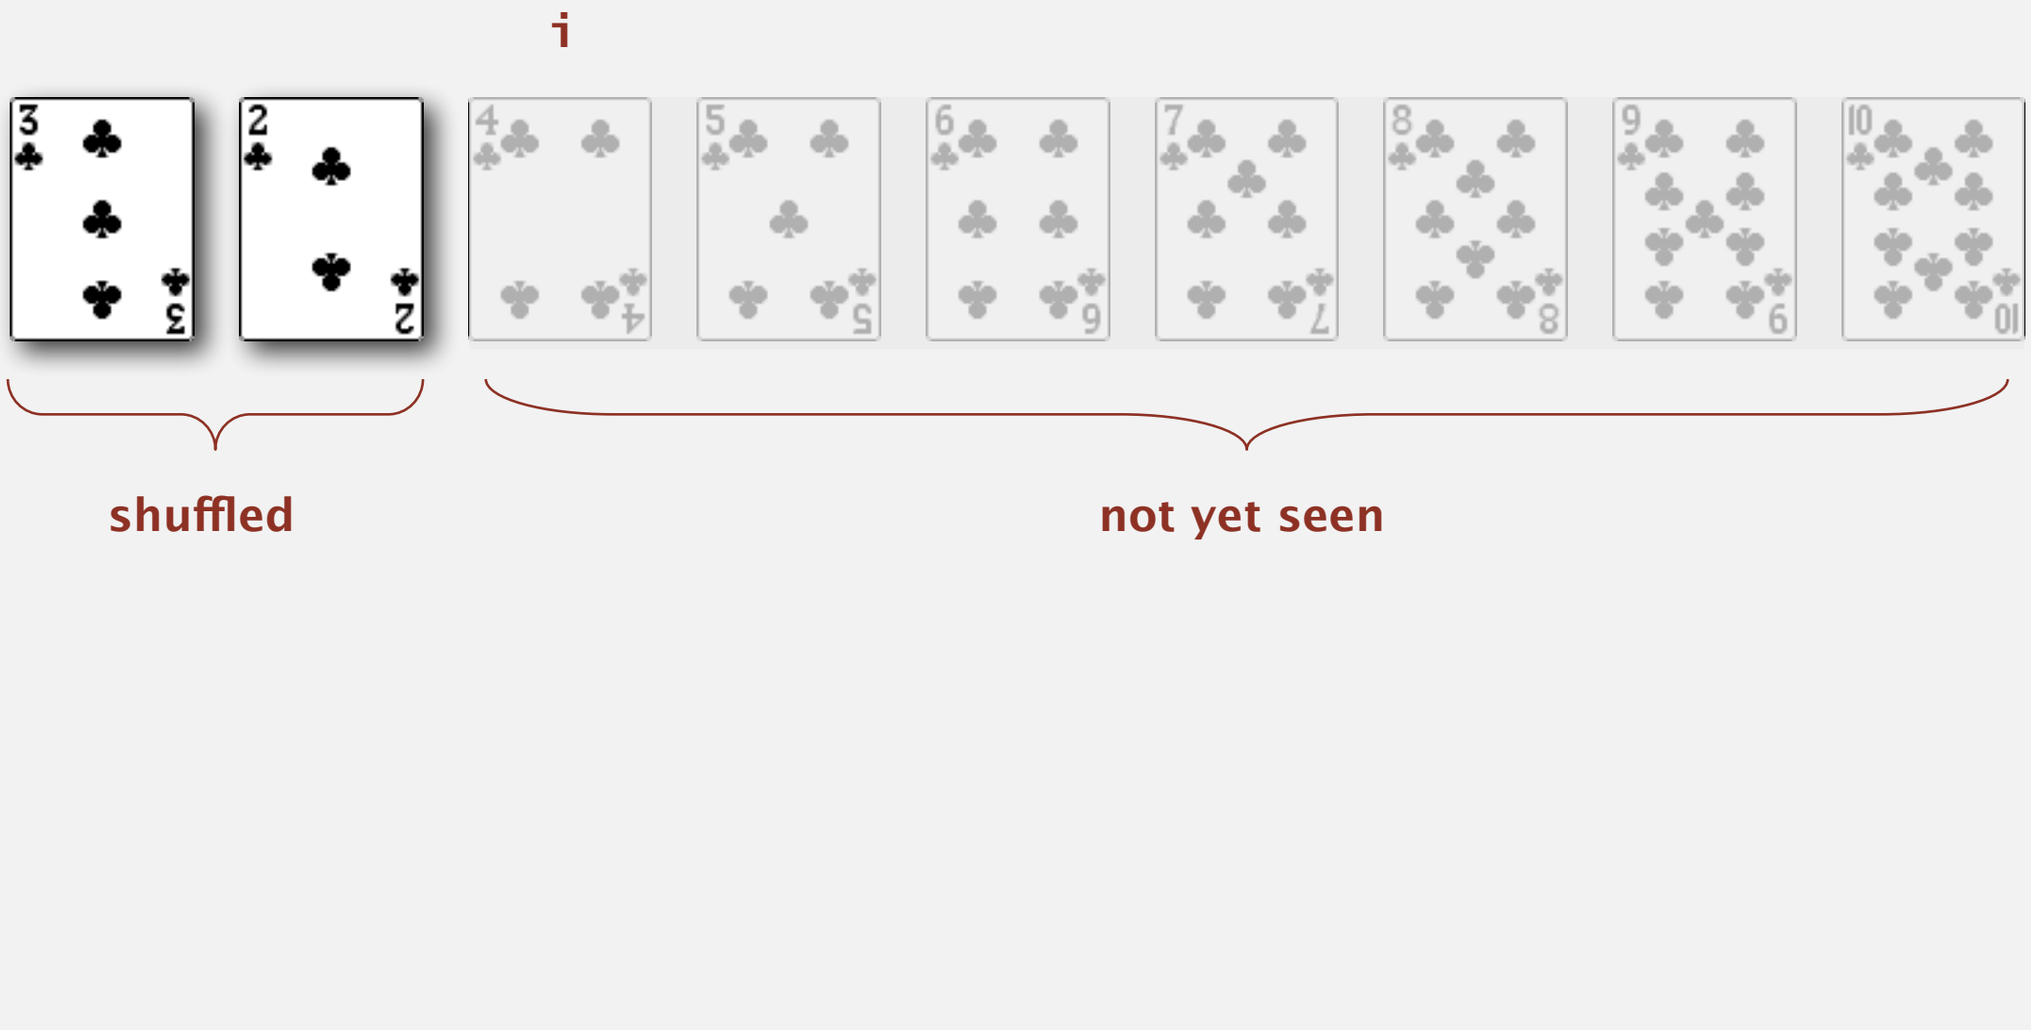

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

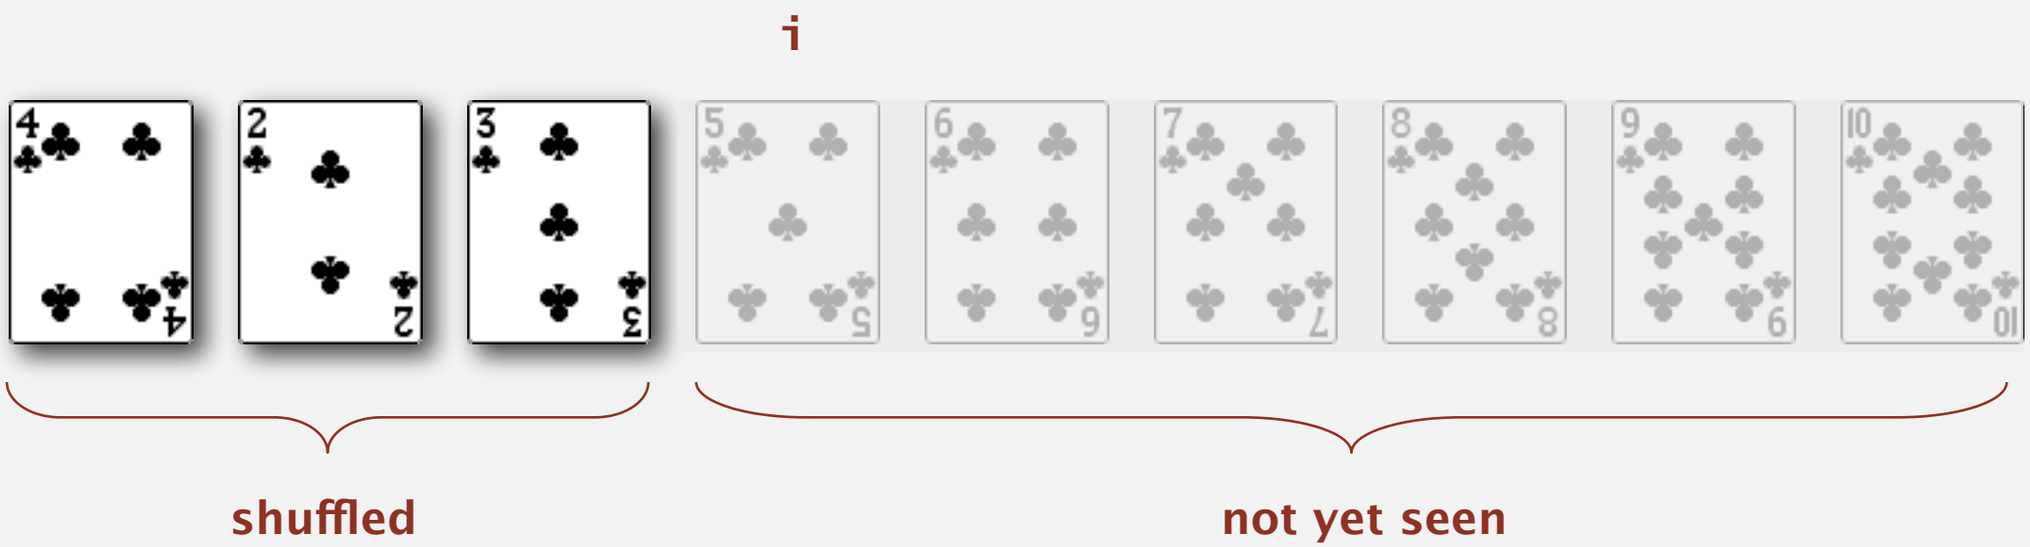

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

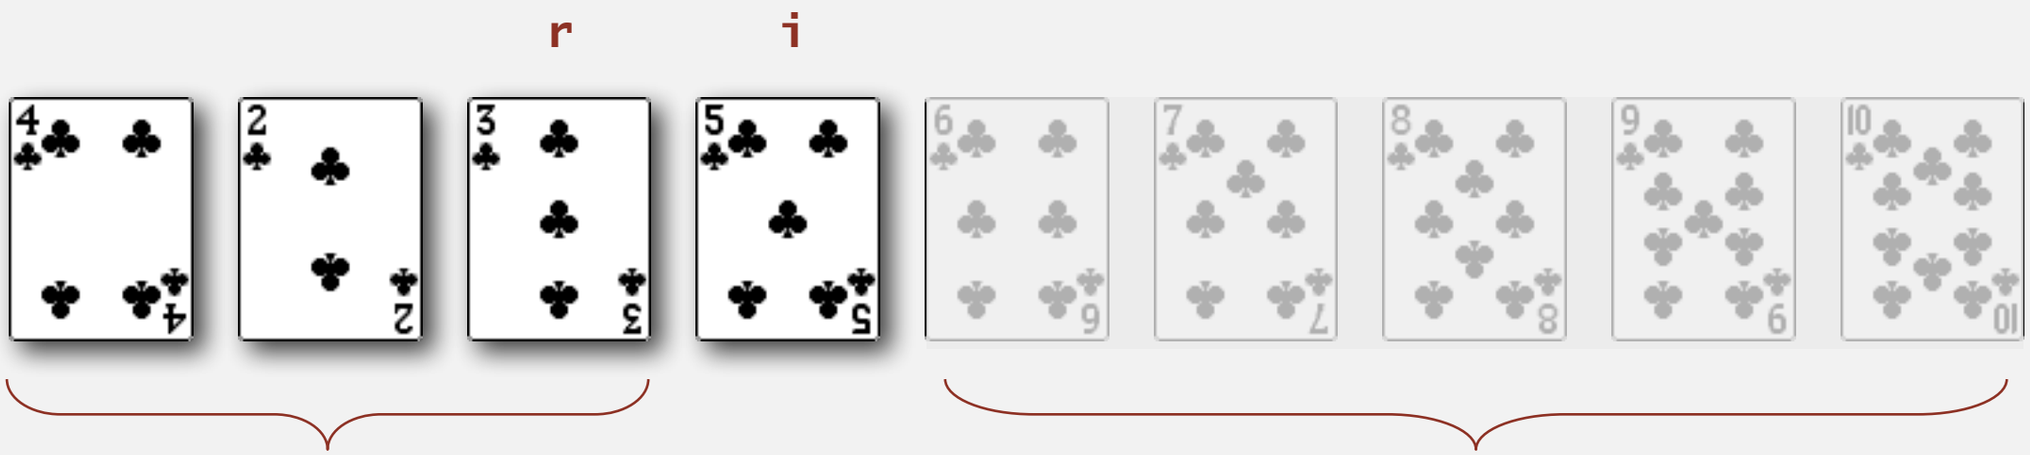

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

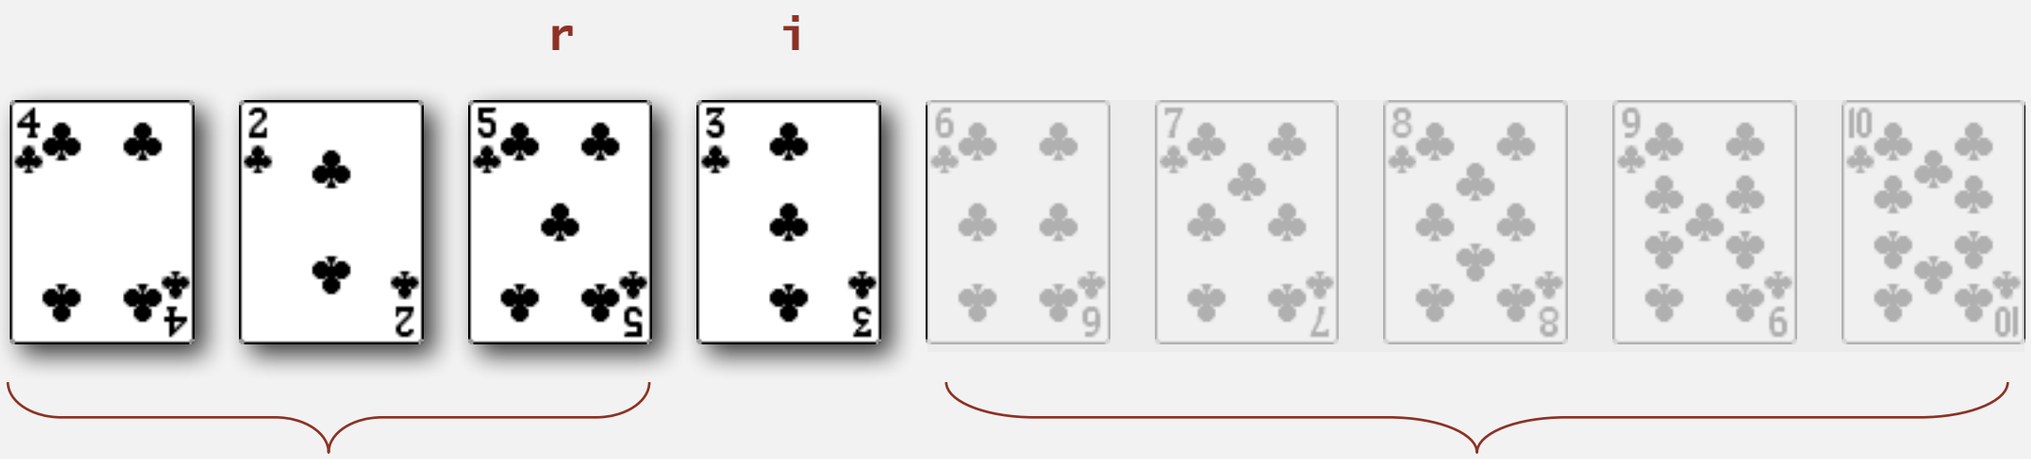

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

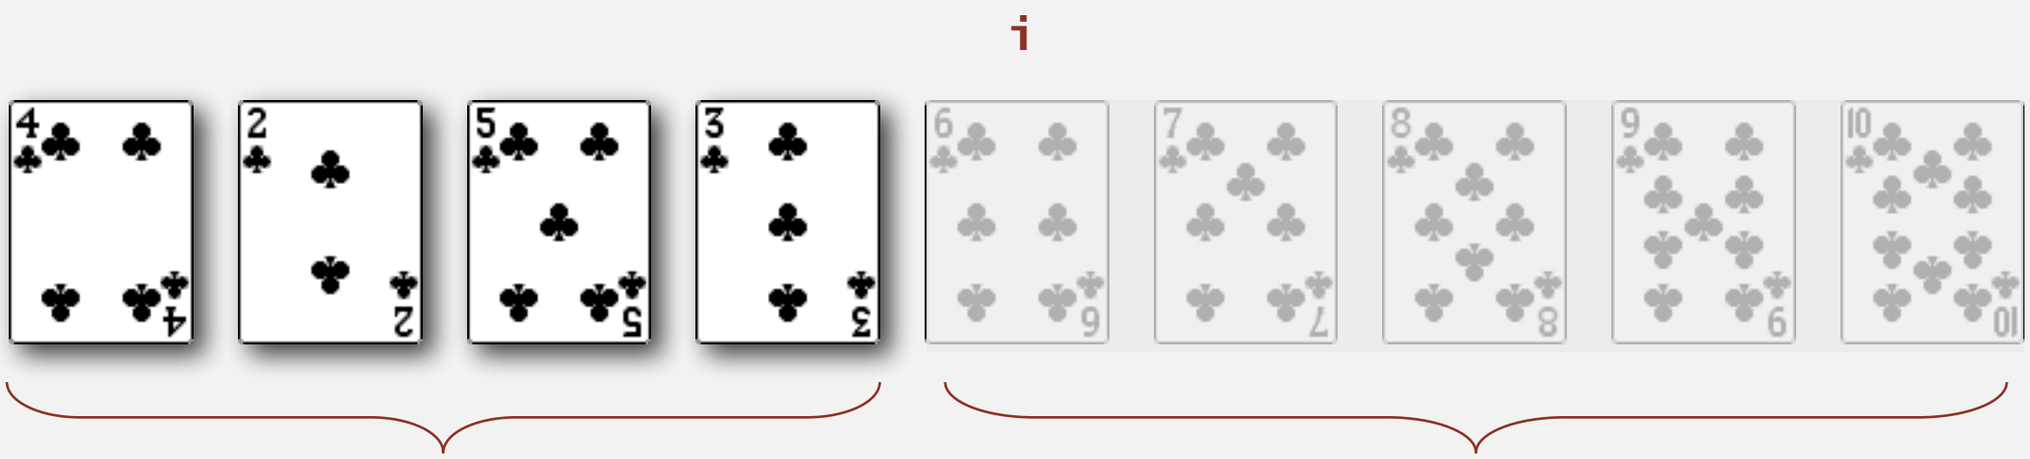

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

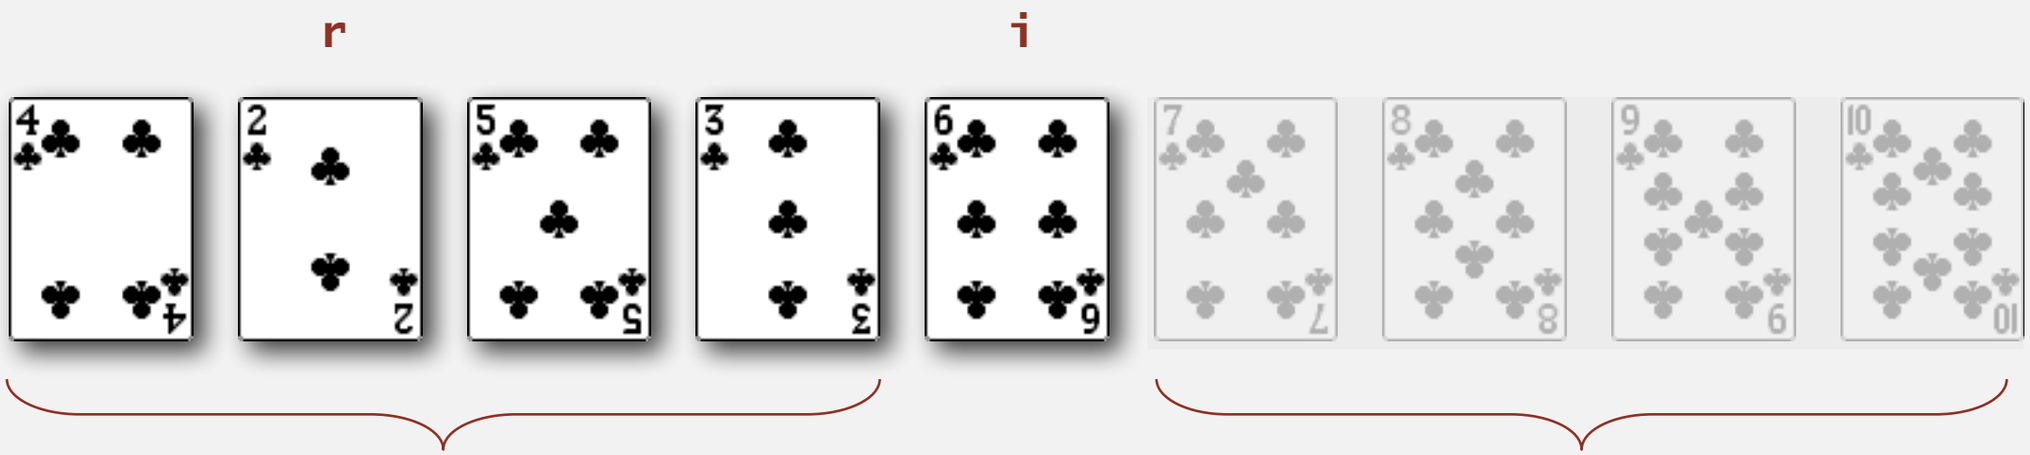

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

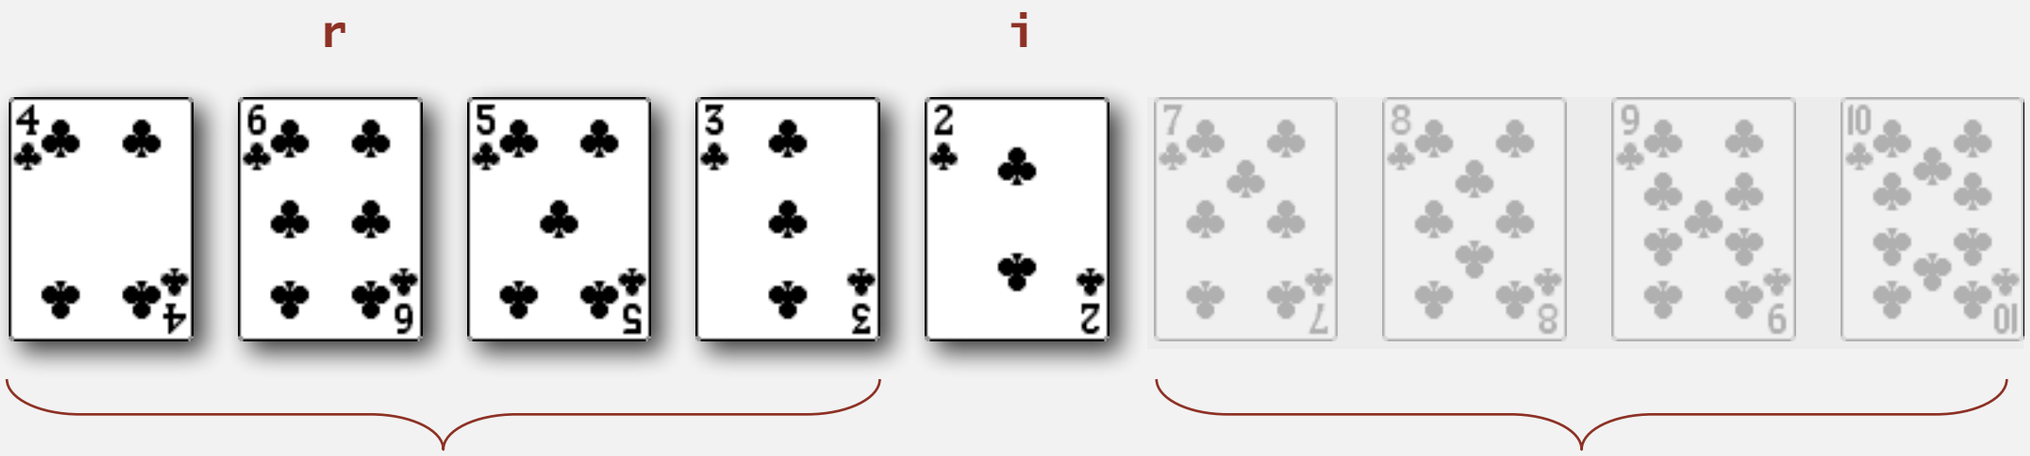

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

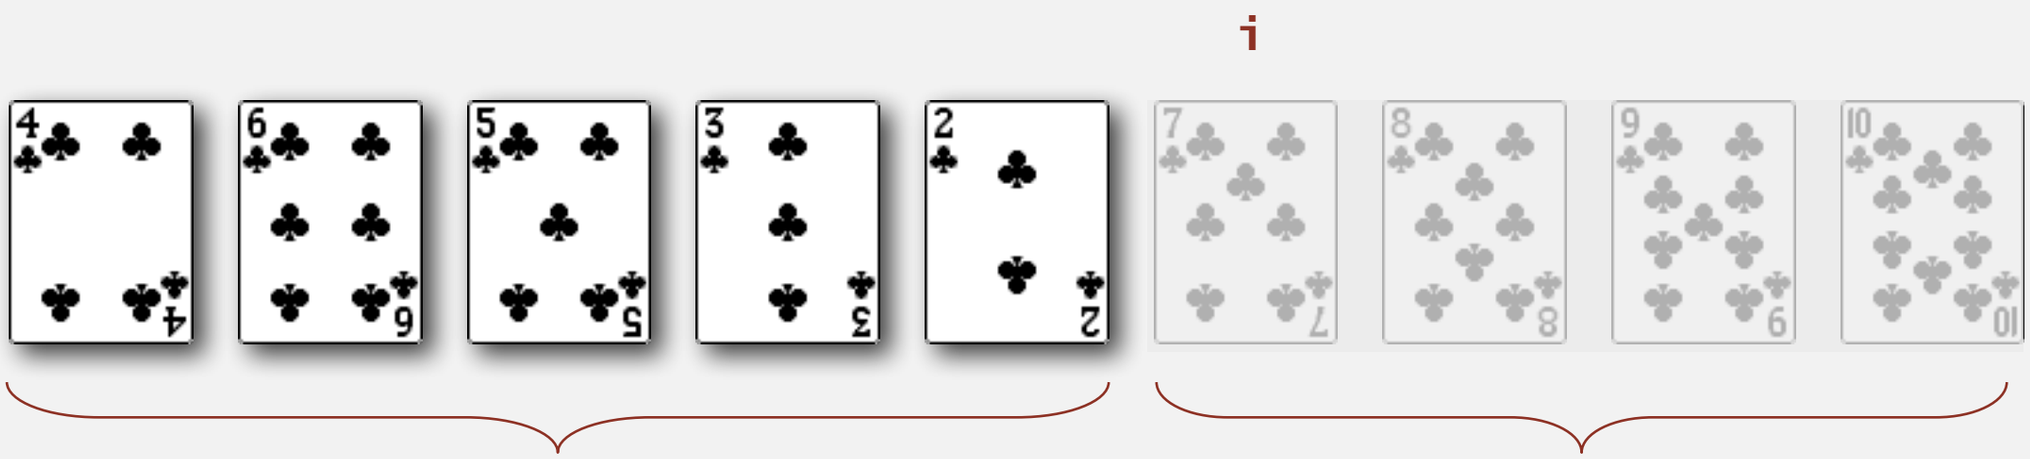

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

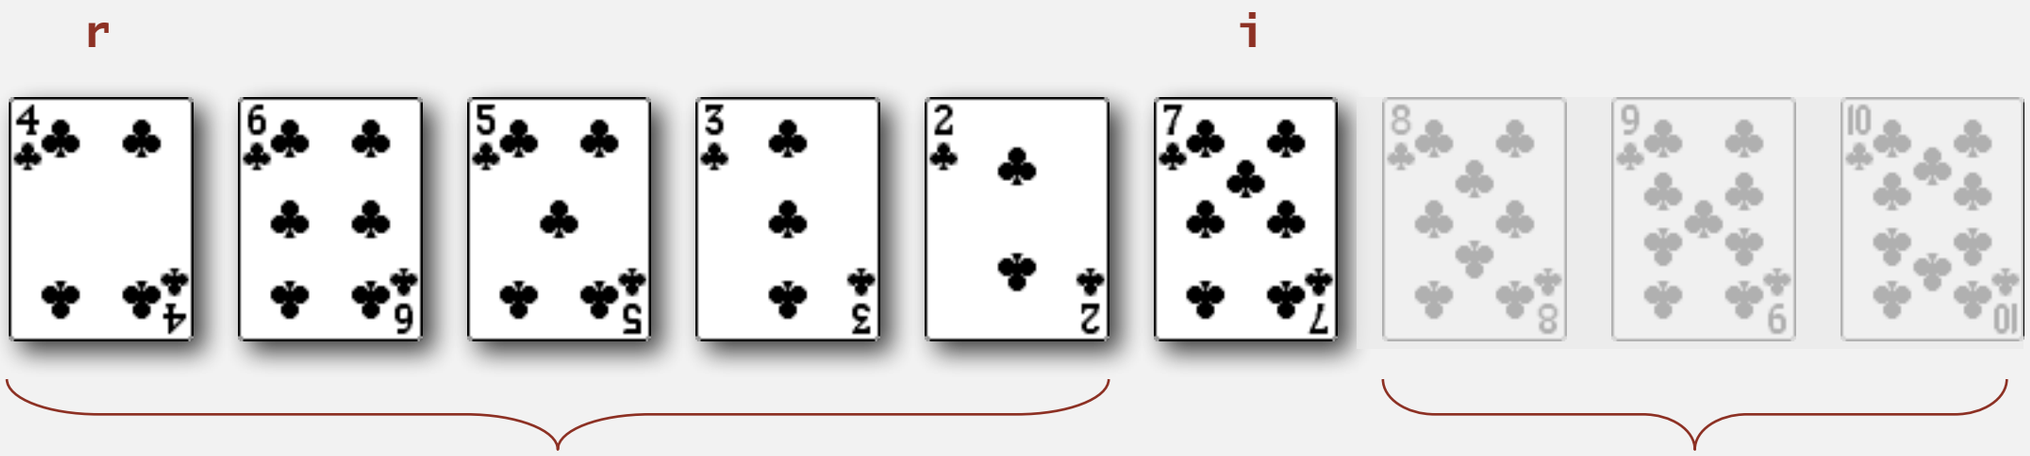

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

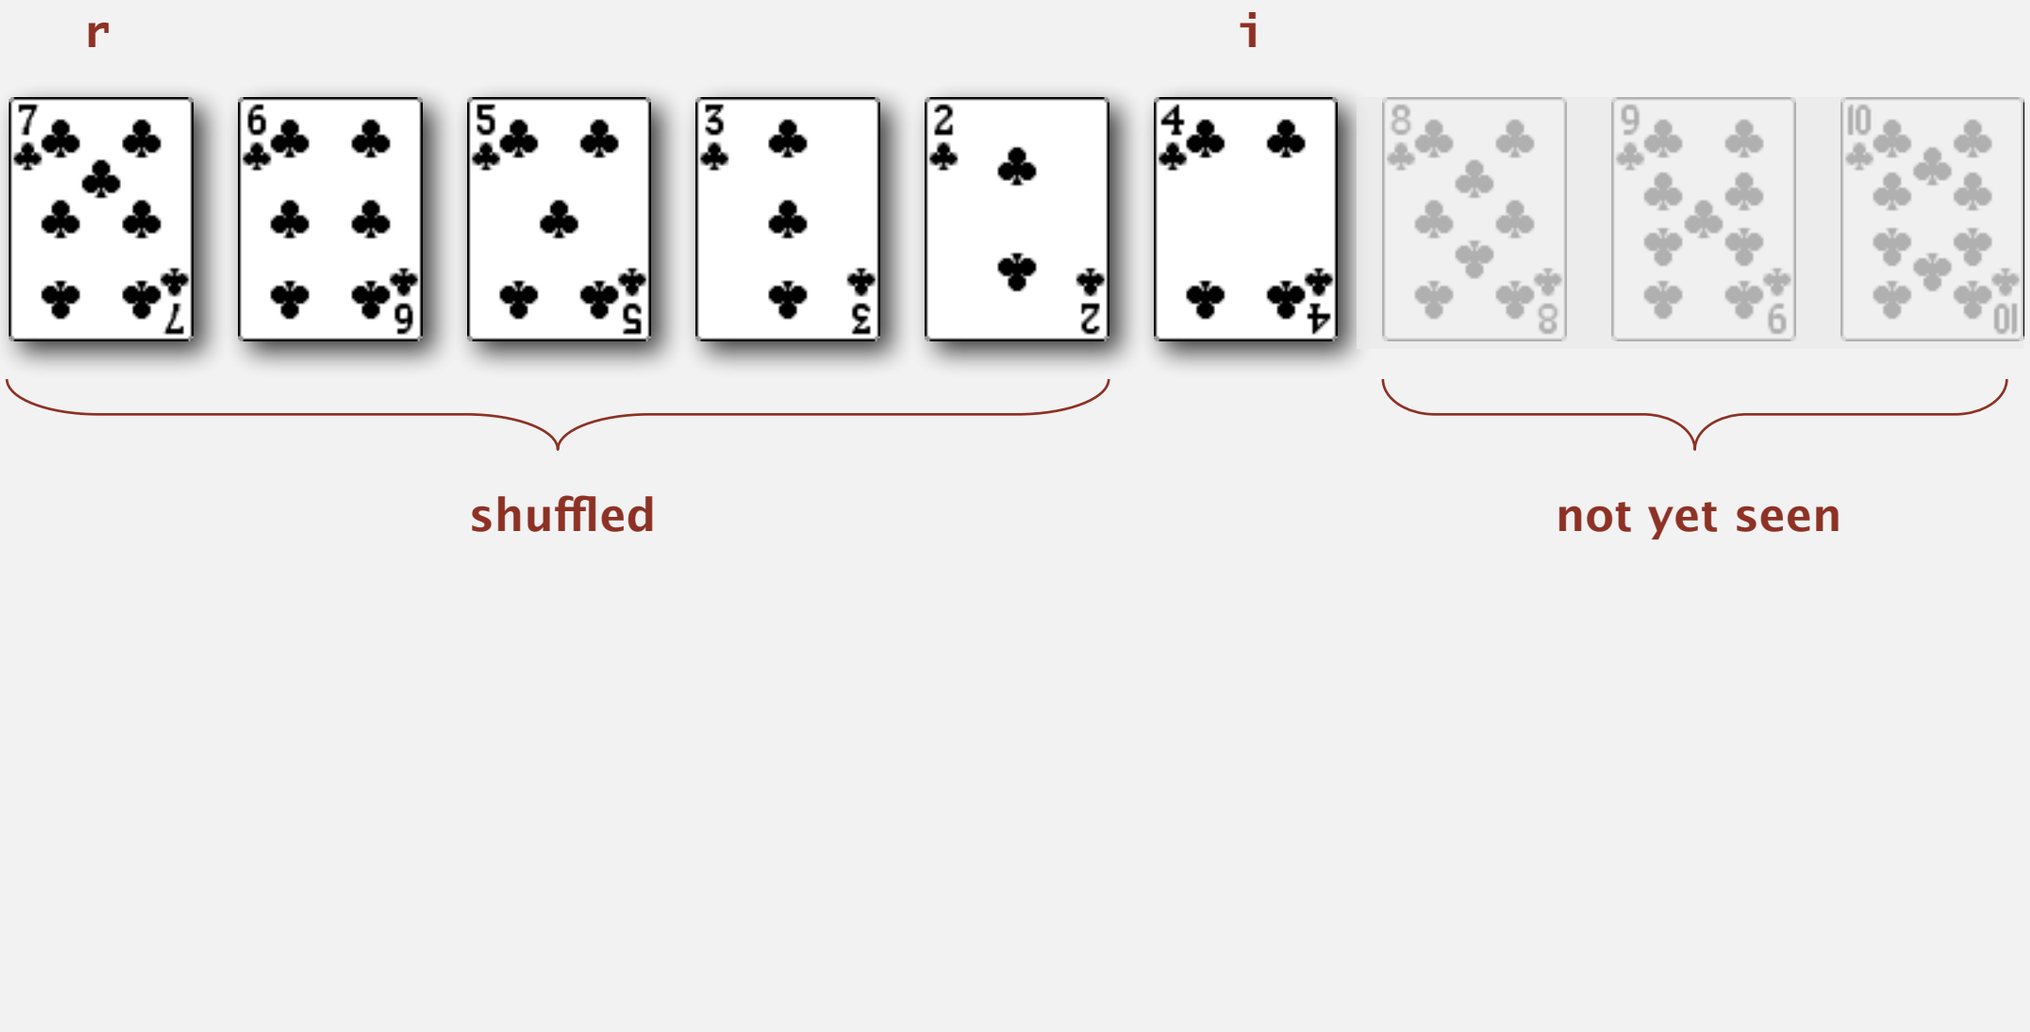

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

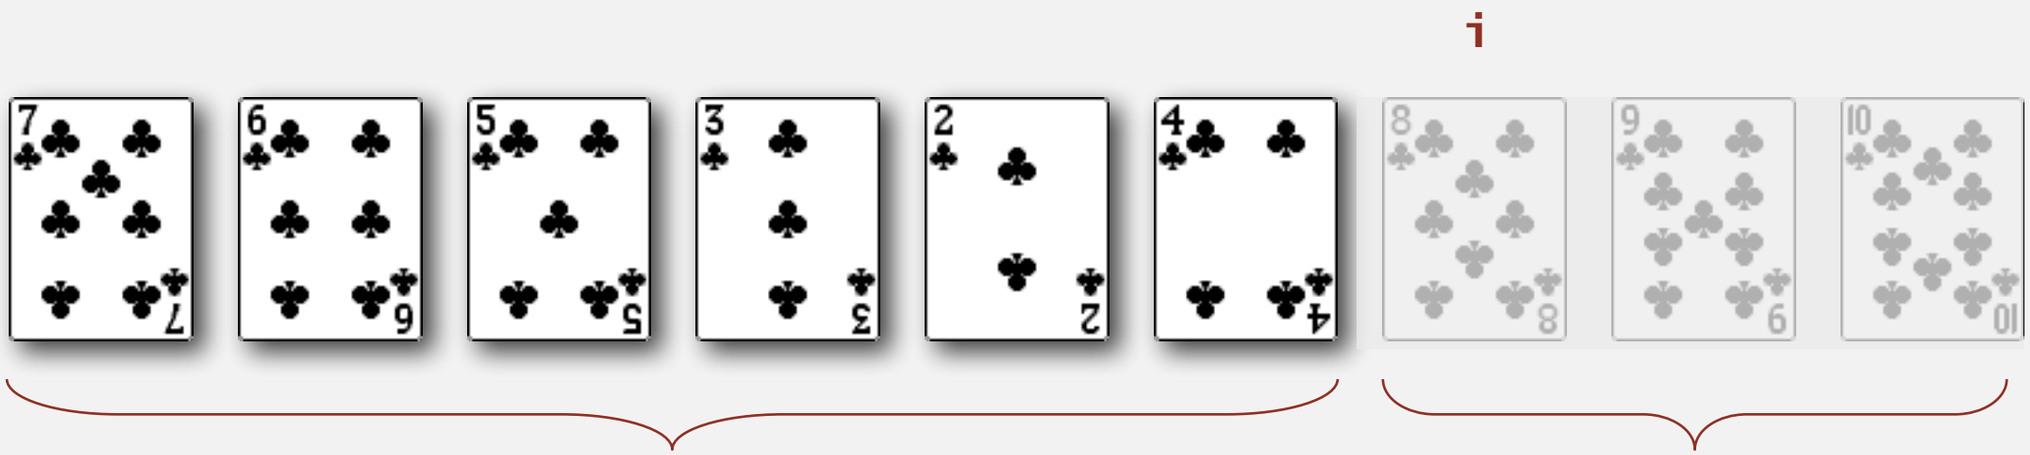

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

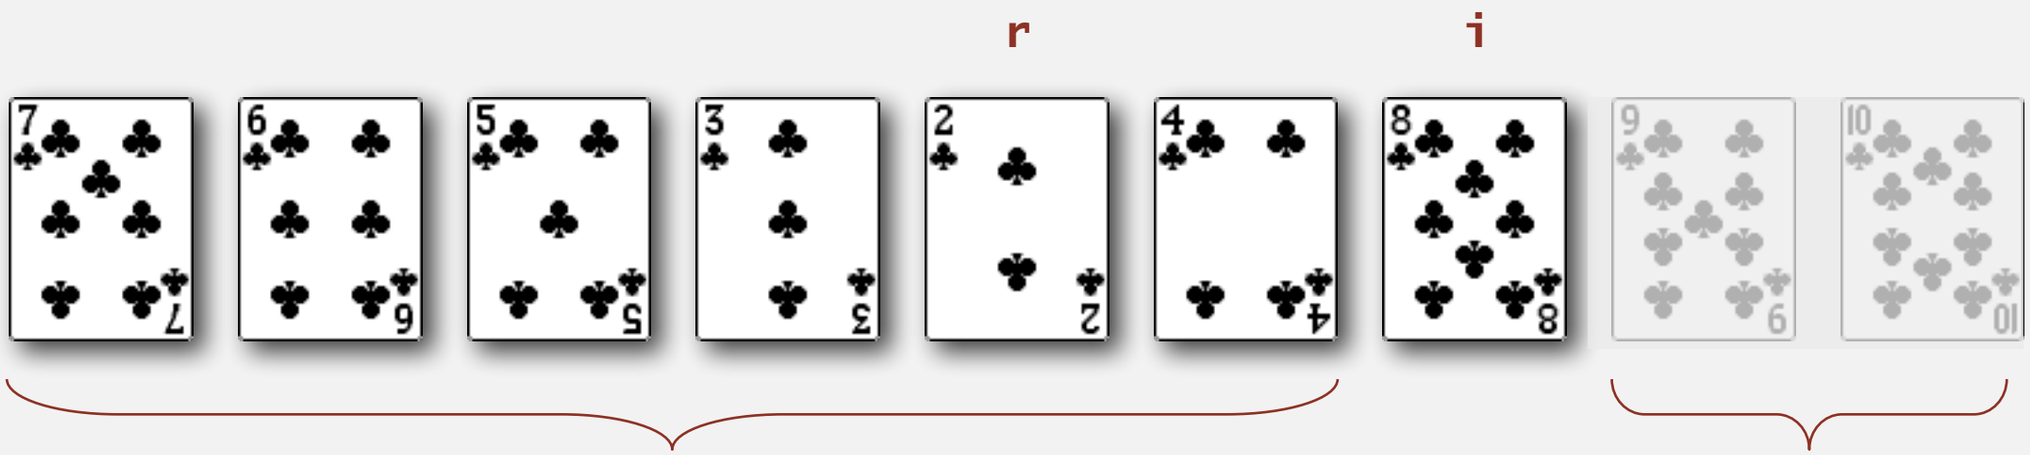

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

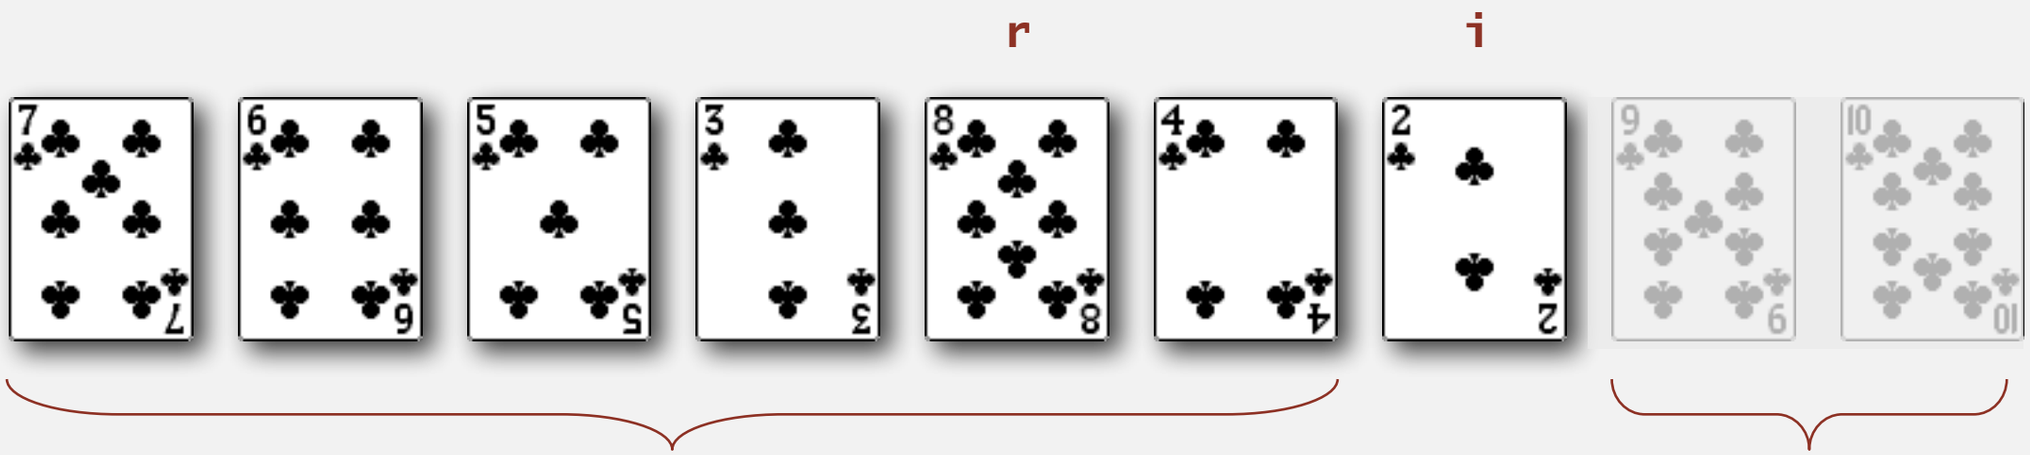

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

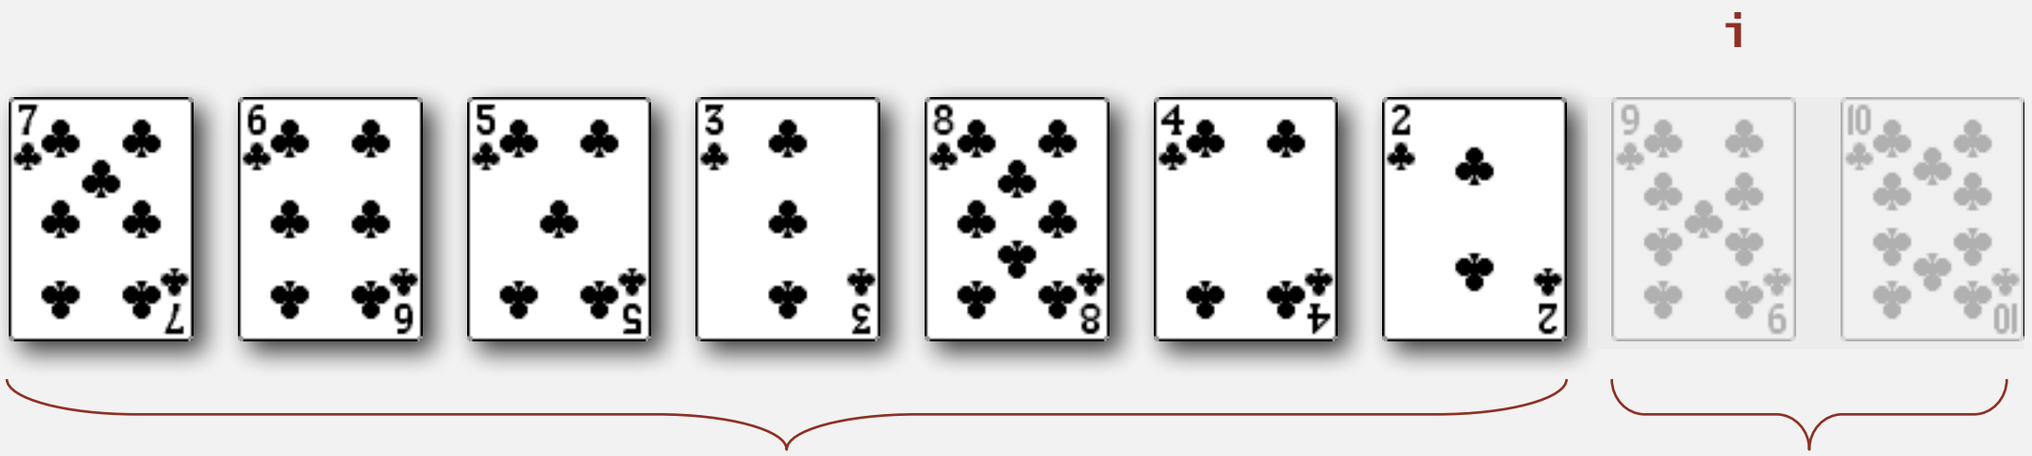

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

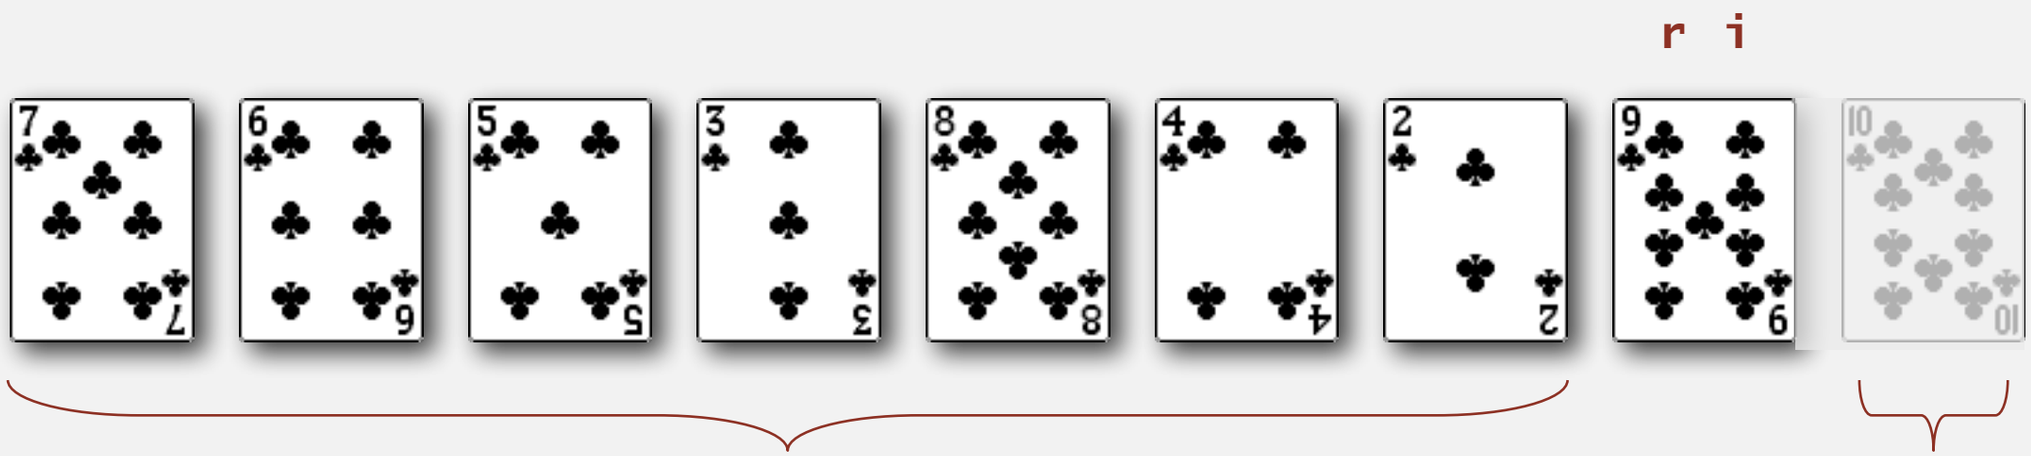

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

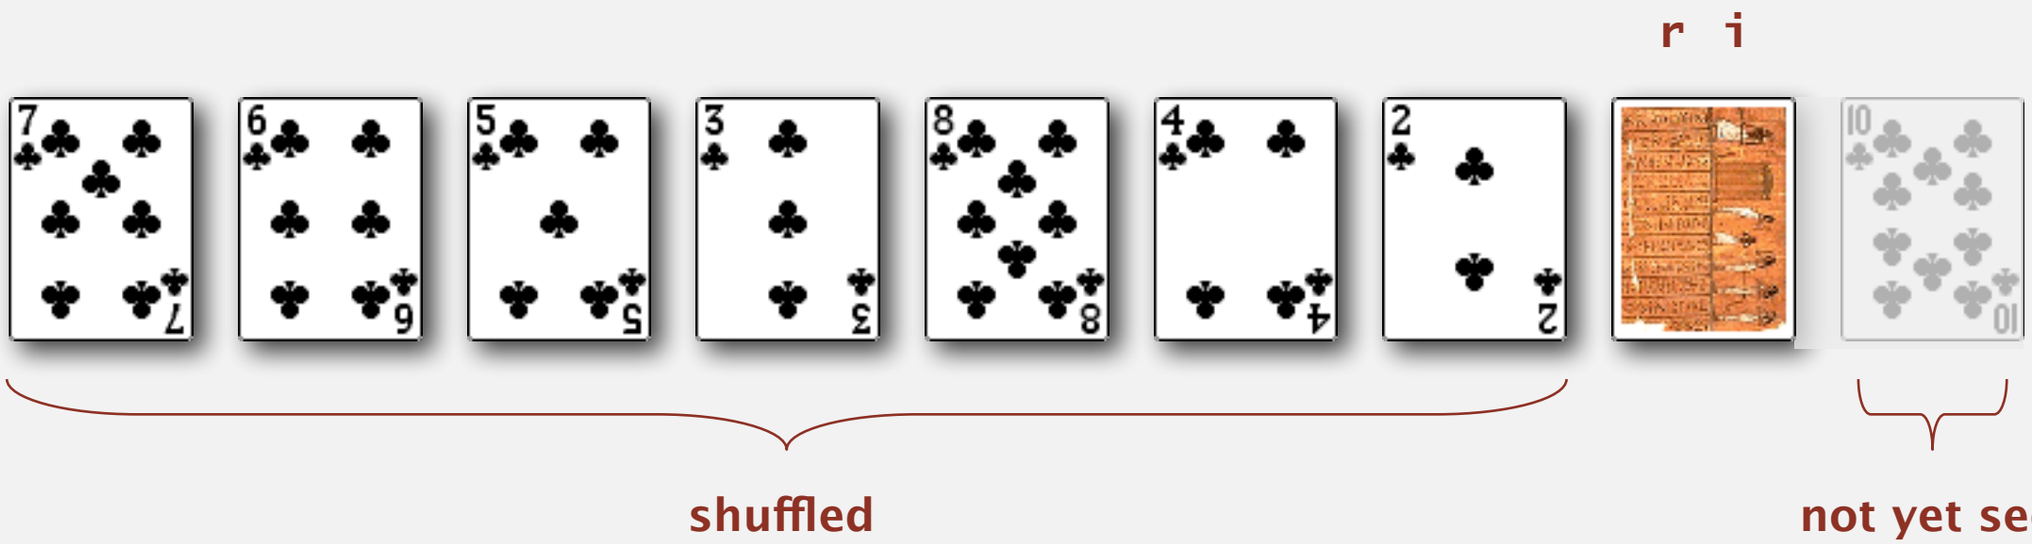

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

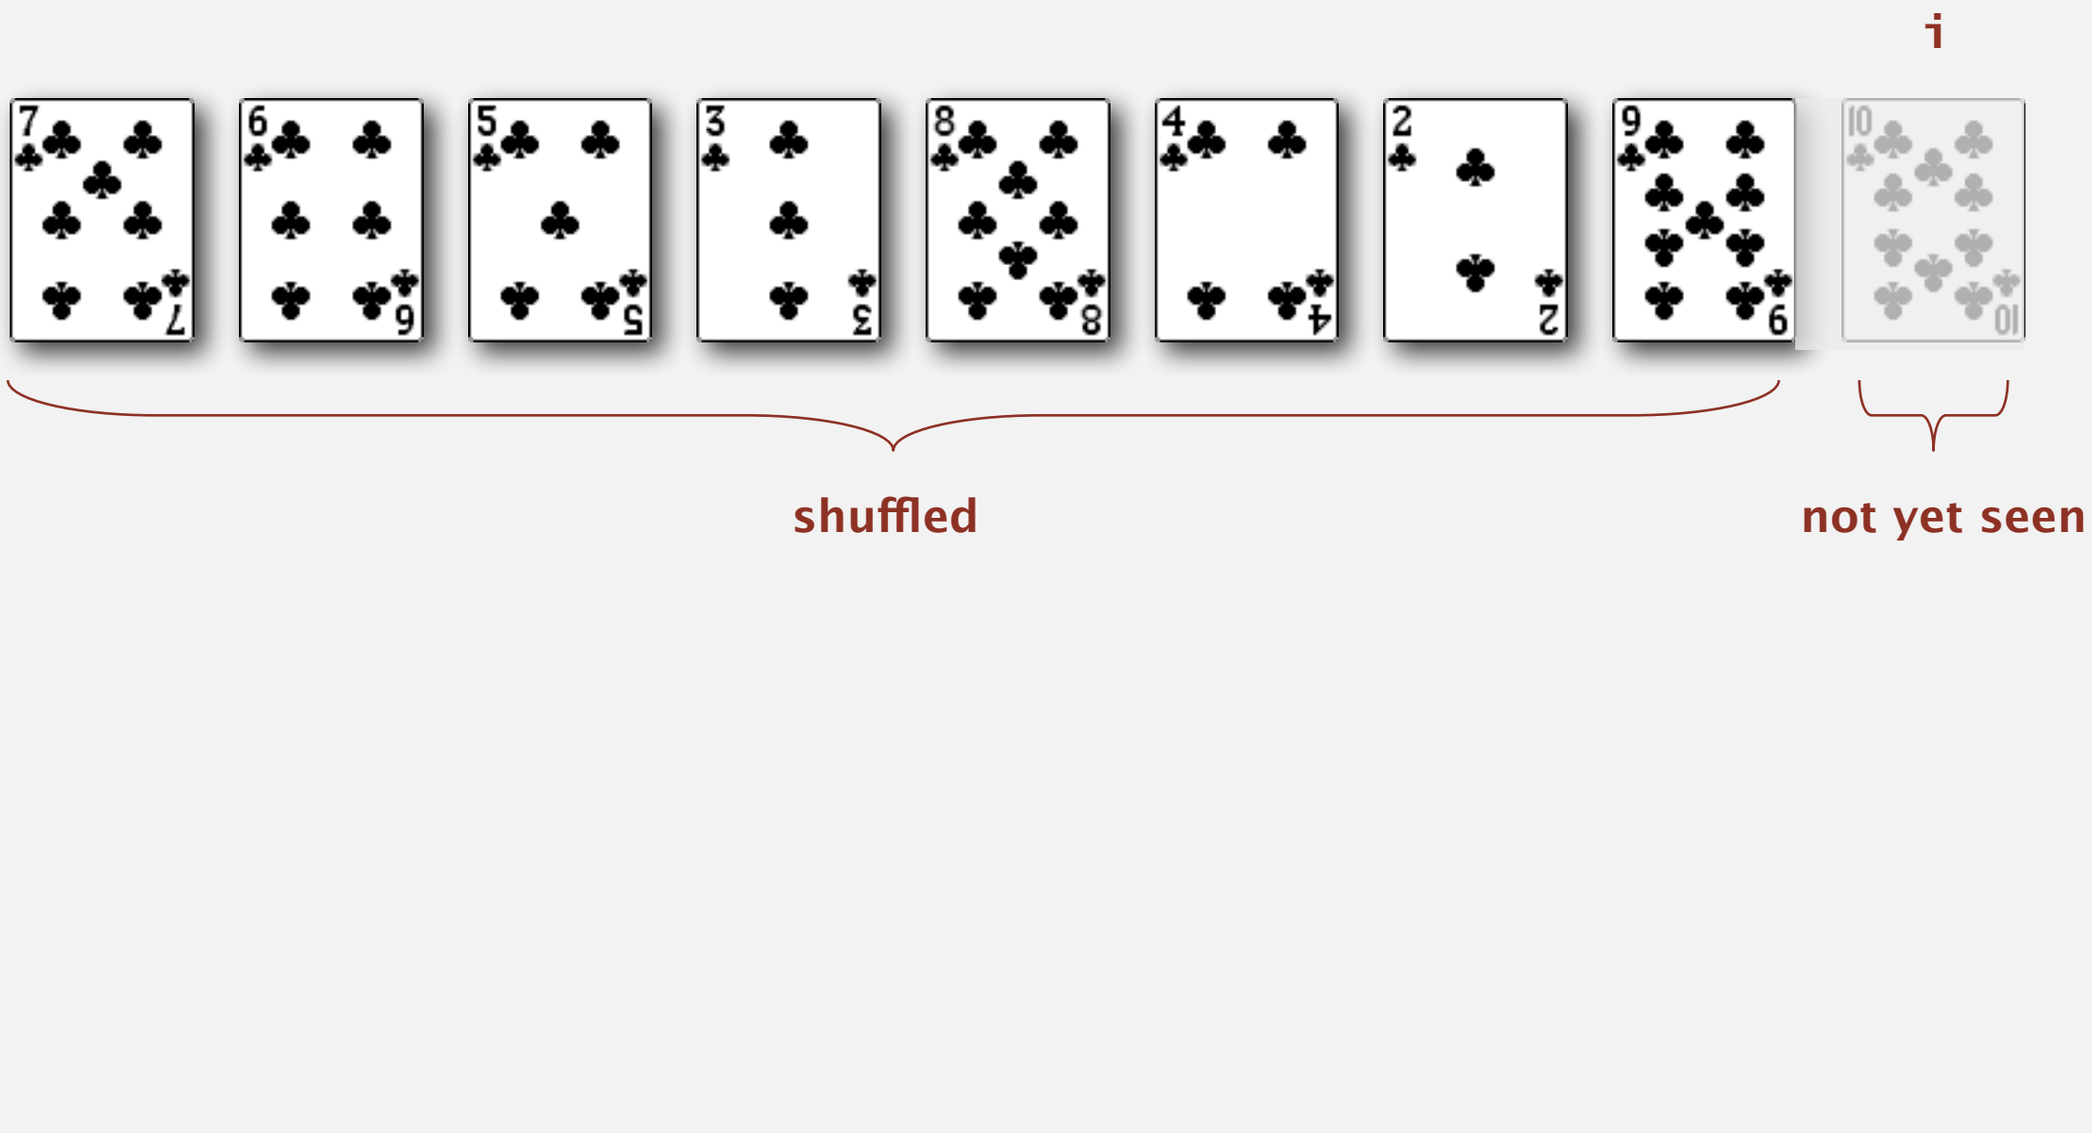

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

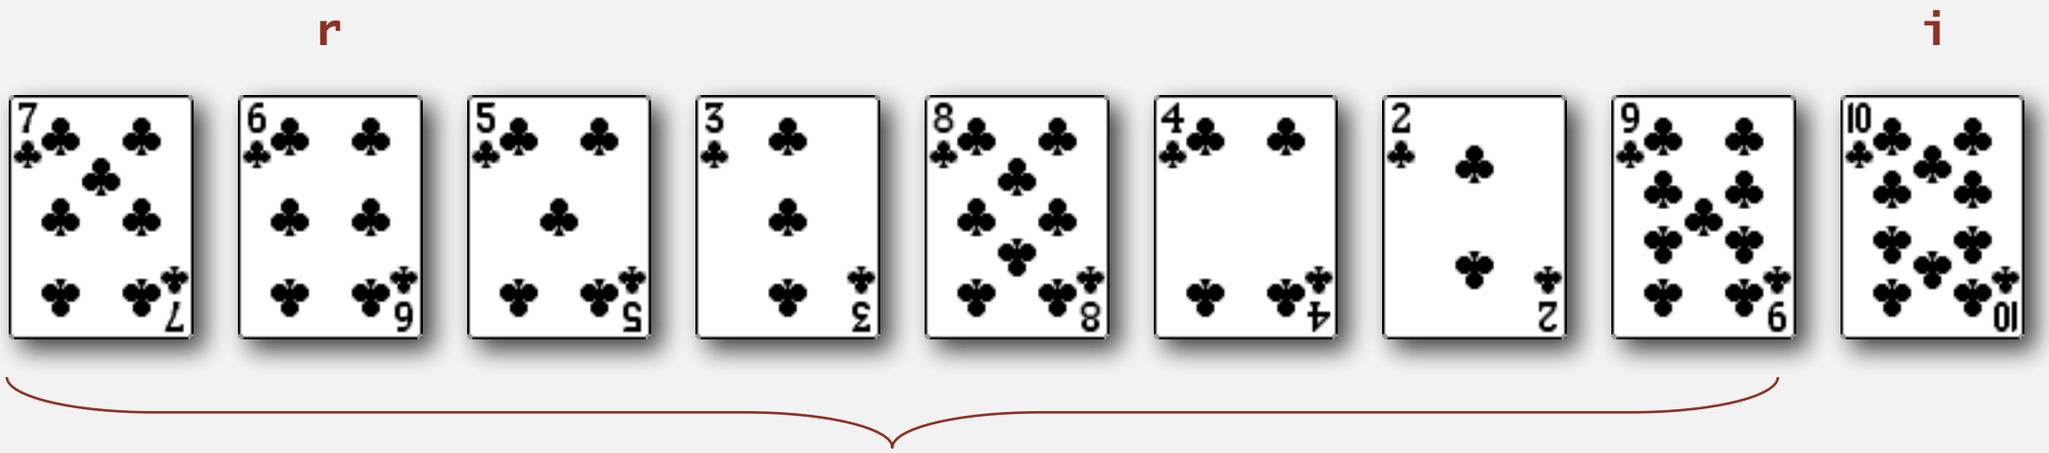

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

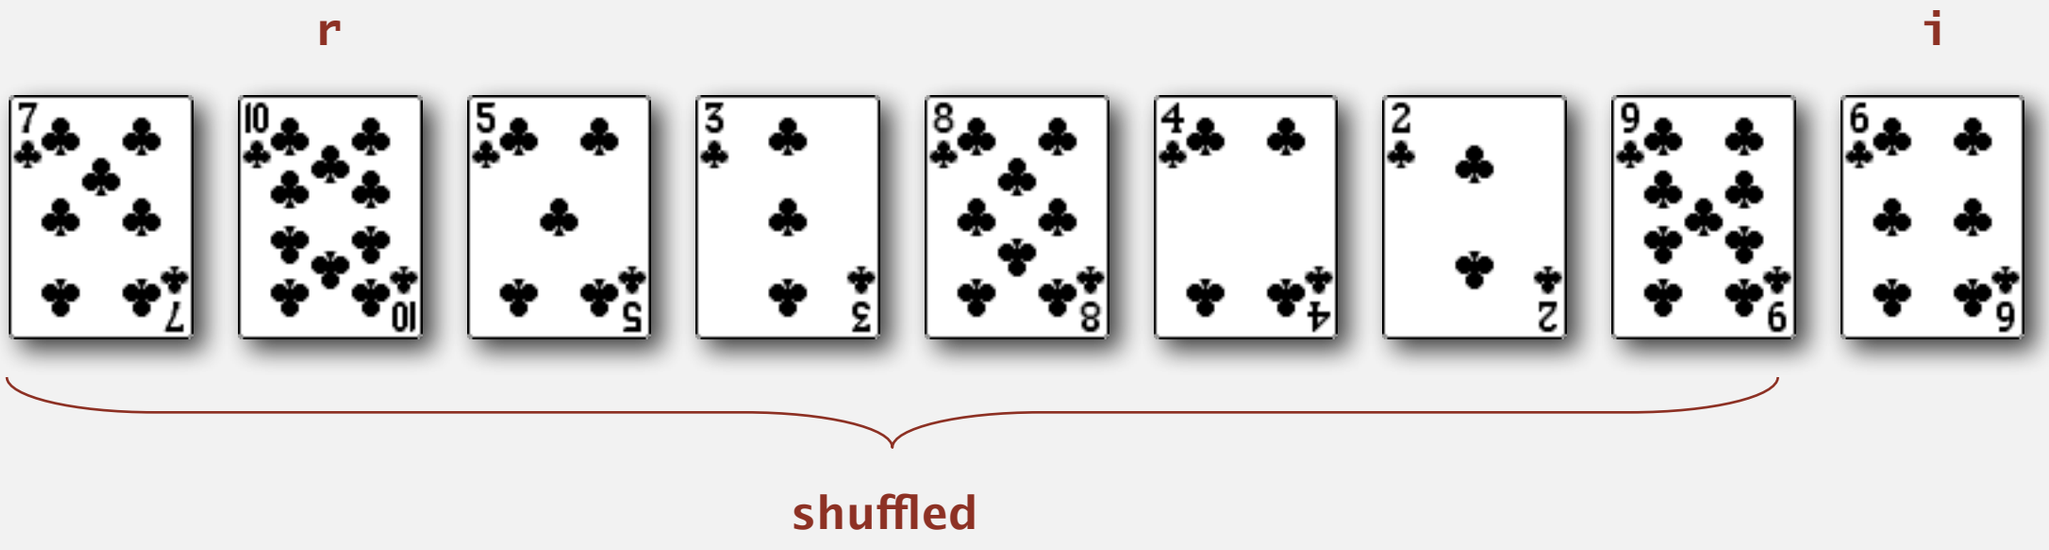

Knuth shuffle

- In iteration `i`, pick integer `r` between `0` and `i` uniformly at random.
- Swap `a[i]` and `a[r]`.

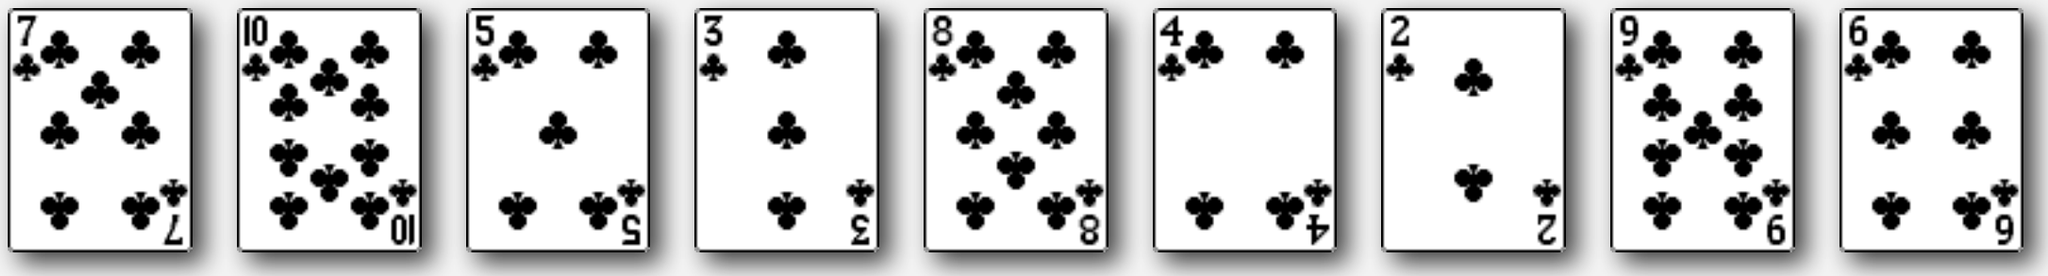

shuffled